

Since 1968

COMMAX
SmartHome & Security

User Manual

DOOR CAMERA DRC-4CGN2




www.commax.com

COMMAX Co.,Ltd.




- Thank you for purchasing COMMAX products.
- Please carefully read this User's Guide (in particular, precautions for safety) before using a product and follow instructions to use a product exactly.
- The company is not responsible for any safety accidents caused by abnormal operation of the product.



1. Name of each part

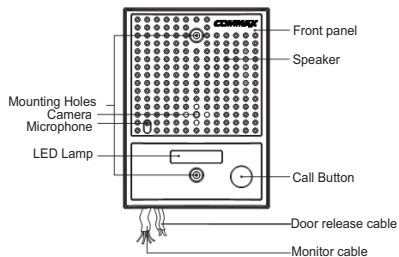


- Please refer to the below images regarding the installation position of the product.




2. Wiring and Installation



1. Cut out the MOUNTING TEMPLATE included in the manual and use it to drill mounting holes($\varnothing 6.5$) on the wall, insert Concrete anchors in the holes.
2. Wire the household monitor cables as shown below with matched polarity as picture below. [FIG-2]
(#1:RED/VOICE, #2:BLUE/GND, #3:YELLOW/DC12V, #4:BLACK/VIDEO)
3. Connect the door release cable as picture below. [FIG-1]
4. For exposed wiring, organize the wiring through the case as shown below.[FIG-3]
5. Secure using bolts and cover with AL.Screw Covers. [FIG-4]



3. Package

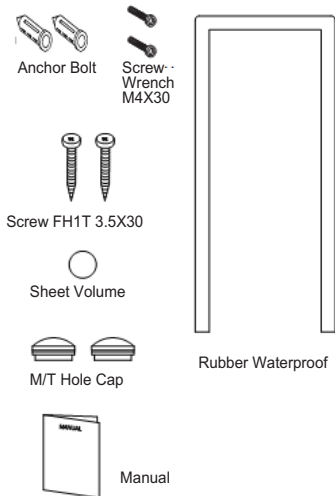

4. Specification

specification	Model	DRC-4CGN2
Image Sensor		CMOS 1/3"
Power source		12V \equiv (supplied from the Monitor)
Wiring(household)		Polar 4 wires
Call mode		Duplex
Camera angle		horizontal angle 68°, vertical angle 55°
Angle adjustment		Fixed
Format		NTSC or PAL STANDARD
Lamp		Built-in white LED (automatically turns on in night)
Low illumination		0.1 LUX (Up to 300mm in front of the camera)
Workable temperature		-10 °C (tested up to -40°C)+50 °C
Dimension(mm)		87.5(W) x 120(H) x 21(D)
Weight(g)		280g

COMMAX

COMMAX Co.,Ltd.

513-11, Sangdaewon-dong, Jungwon-gu, Seongnam-si, Gyeonggi-do, Korea
Int'l Business Dept. : Tel.; +82-31-7393-540~550 Fax.; +82-31-745-2133
Web site : www.commax.com

PM104CGN2000

Printed In Korea / 2016.04.105