




## DATASHEET TR-NS15061S-150-4PoE

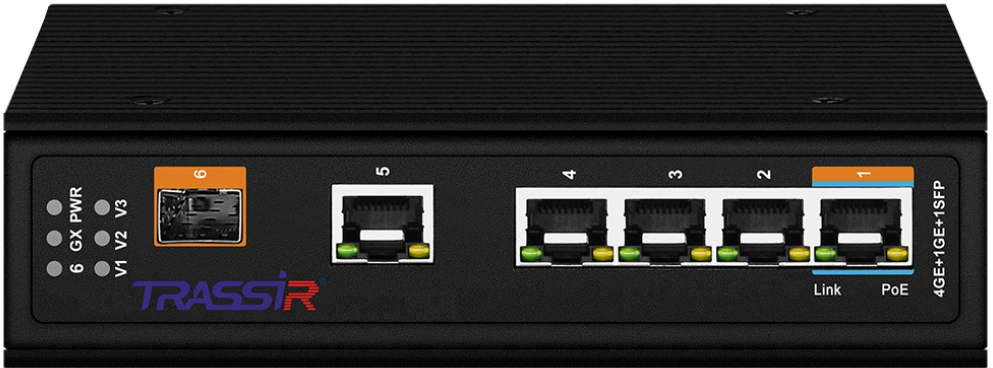

**TR-NS15061S-150-4PoE** – is an unmanaged switch with 4 10/100/1000 Mbps PoE ports with the ability to power up the connected devices power twisted pair.

### Basic equipment:

- Switch ..... 1pcs.
- DIN-Rail Kit ..... 1pcs.
- Datasheet ..... 1pcs.

### Warranty service:

- Three - year warranty service from the date of sale.
- In case of the warranty card absence, the warranty period is determined from the date of sale.

## Specification:

<b>Model</b>	<b>TR-NS15061S-150-4PoE</b>	
<b>Ethernet ports</b>	4 x 10/100/1000 Mbps (Base-T) 1 x 10/100/1000 Mbps (Base-T, RJ45) 1 x 1000 Mbps (Base-X, SFP)	
<b>PoE Standards</b>	Port 1: IEEE802.3af/at/bt	Ports 2-4: IEEE802.3af/at
<b>Maximum capacity per port</b>	Total: 150W Port 1: up to 60W	Ports 2-4: up to 30W
<b>Power pinout via PoE</b>	Port 1: DC+: 1/2/4/5 DC-: 3/6/7/8	Ports 2-4: DC+: 1/2 DC-: 3/6
<b>Switching capacity</b>	12 Gbps	
<b>Transmission speed</b>	8.92 Mpps	
<b>Buffer size</b>	2.5 MB	
<b>MAC addresses table size</b>	2000	
<b>Stream management</b>	No	
<b>Data transmission range</b>	Up to 250m	
<b>Function</b>	Autoadaptation	
<b>PD Alive<sup>1</sup></b>	Supported. The port restarts 150 seconds after device connection loss	
<b>Power</b>	PoE: DC 37-57V noPoE: DC 12-57V	
<b>Lightning protection</b>	Standard mode 2kV Differential mode 4kV	
<b>Electrostatic discharge protection</b>	Air discharge 8kV Contact discharge 15kV	
<b>Maximum power consumption</b>	150W	
<b>Installation</b>	DIN-Rail	
<b>Working temperature</b>	-40°C...80°C	
<b>Permissible humidity level</b>	5 – 95 %	
<b>Weight, kg</b>	0.9	
<b>Dimensions (W x D x H), mm</b>	155 x 115 x 40	

<sup>1</sup> For more details, see the user manual for the device.

DATE OF SALE

SERIAL NUMBER