

**DS-K7C01
Stand Pole**

- Support a variety of peripheral installations, such as card, QR code, exit button.
- In the case of pushing goods and cycling, swiping cards from a distance.

▪ Specification

| Interface | |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Exit button | 1 for exit button pole |
| RS-485 | 1 for card reader and Qr code reader |
| General | |
| Pedestal material | SUS304 stainless steel |
| Built-in access controller | No |
| Indicator | Support |
| Power supply | DC 12 V 2A |
| Power consumption | 6 W for card reader post 12 W for QR & card reader post |
| Working temperature | -20°C ~ 65°C (-4°F ~ 149°F) |
| Working humidity | 0% to 95% (No Condensing) |
| Dimensions | Without Packaging: 900mm x ϕ 137mm (35.4' x ϕ 5.4') With Packaging: 1105mm x 215mm x 225mm (43.5' x 8.5' x 8.9') |
| Weight | card pole: (Net) Left: 3.75 kg (8.3 lb); (Rough) Left: 4.8 kg (10.6 lb); Qr & card or push button pole: (Net) Left: 3.53 kg (7.8 lb); (Rough) Left: 4.87 kg (10.7 lb); |
| Application environment | Indoor and outdoor |

▪ Maintenance

The main element of the turnstile is stainless steel, which is rustless (antioxidant) and corrosion resistant (The anti corrosion ability in the medium of acid, alkali, and salt). In order to keep the stainless steel from being oxidized or corroded, you should clean and care the turnstile surface periodically .


The instructions and tips for maintaining the turnstile are as follows:

- Select different stainless steel types according to the variety of the environments. You can select 304 stainless steel for common circumstances and 316 stainless steel for the scenarios of seashores and chemical plants.
- Keep the device surface clean and dry.
- Use non-woven cloth and ethyl alcohol to clean the dirt on the device surface.
- Use sourcing pad (do not use mesh cleaning ball) to clean the rust on the device surface by following the wire drawing on the stainless steel. And then use non-woven cloth and stainless steel cleaner to wipe the device surface.
- Clean and maintain the device by using non-woven cloth and stainless steel cleaner periodically. It is suggest to clean the device every month in common circumstances and every week for severe environments (seaside and chemical plants for instance).

▪ Available Model

DS-K7C01/Q,DS-K7C01/D,DS-K7C01/ED,DS-K7C01/DQ,DS-K7C01/EQDS-K7C01/B,DS-K7C01/E

▪ Dimension

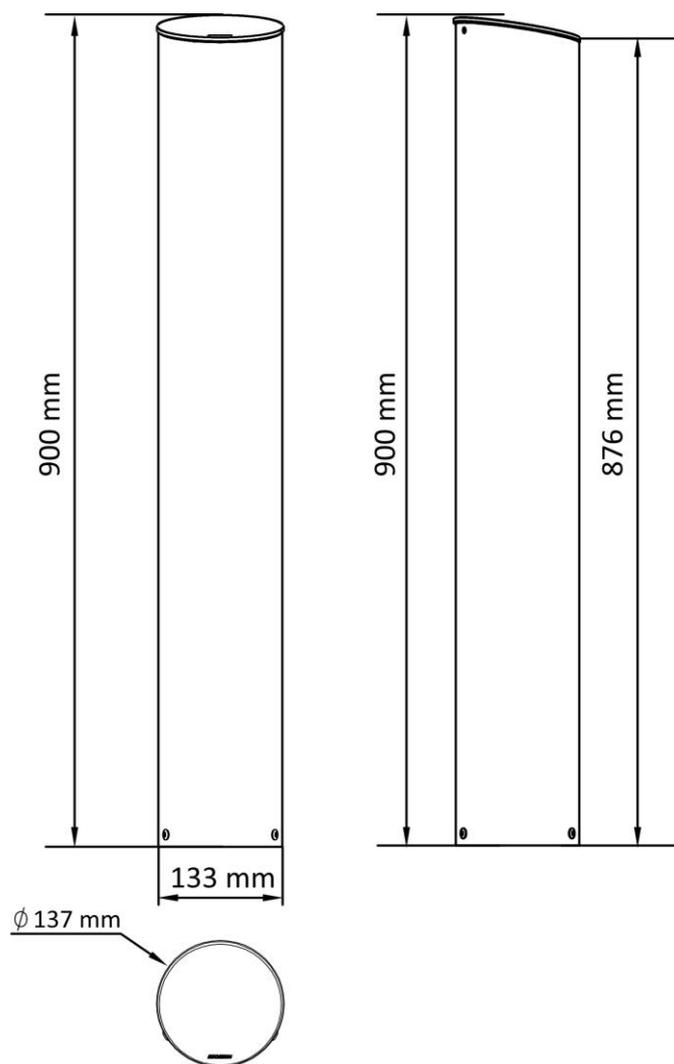

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

