




DATASHEET
TR-NS1406-65-4PoE

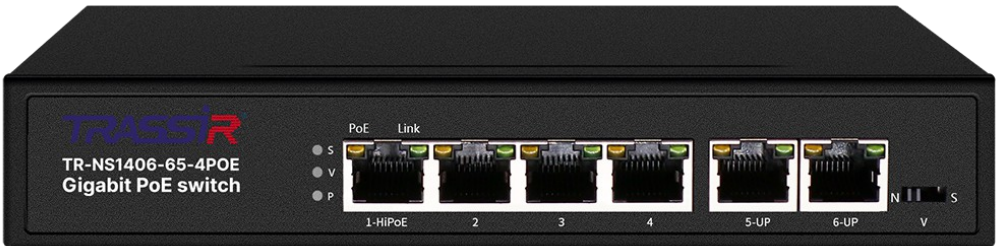

TR-NS1406-65-4PoE is an unmanaged switch with 4 x 10/100/1000 Mbps PoE ports with the ability to power up the connected devices through twisted pair.

Basic equipment:

- Switch 1pcs.
- Power cord with adapter 1pcs.
- User Manual 1pcs.p
- Device datasheet 1pcs.

Specification:

Model	TR-NS1406-65-4PoE	
Ethernet ports	4 x 10/100/1000 Mbps (Base-T) 2 x 10/100/1000 Mbps (Uplink, Base-T)	
PoE Standards	Port 1: IEEE802.3af/at/bt	Ports 2-4: IEEE802.3af/at
Maximum capacity per port	Total: 65W Port 1: up to 60W	Ports 2-4: up to 30W
Power pinout via PoE	Port 1: DC+: 1/2/4/5 DC-: 3/6/7/8	Ports 2-4: DC+: 1/2 DC-: 3/6
Switching capacity	12 Gbps	
Transmission speed	8.928 Mpps	
Buffer size	2.5 MB	
MAC addresses table size	2000	
Stream management	By selection	
Function	Normal mode VLAN CCTV	
PD Alive¹	Supported. The port restarts 175 seconds after device connection loss.	
Power consumption	100-240V AC power adapter	
Lightning protection	Standard mode 6kV Differential mode 2kV	
Electrostatic discharge protection	Air discharge 10kV Contact discharge 8kV	
Maximum power capacity	65W	
Working temperature	-10°C...55°C	
Permissible humidity level	0 – 90 %	
Weight, kg	0.62	
Dimensions (WxDxH), mm	190 x 130 x 35	

¹ For more details, see the user manual for the device.

Warranty service:

- Three - year warranty service from the date of sale.
- In case of the warranty card absence, the warranty period is determined from the date of sale.

DATE OF SALE

SERIAL NUMBER