Simo 1968



# **User Manual**

#### Single Master with Multiple Remotes INTERPHONE SYSTEM TP-12RM



www.commax.com

#### COMMAX Co.,Ltd.



- Thank you for purchasing COMMAX products.
- Please carefully read this User's Guide (in particular, precautions for safety) before using a product and follow instructions to use a product exactly.
- The company is not responsible for any safety accidents caused by abnormal operation of the product.





Table of contents	. 1
1. Greetings	. 1
2. Warnings and cautions	. 2
3. Installation	
4. Wiring	. 4
5. Power Supply	. 5
6. Operation Instruction	. 5
7. Call Another Station	. 5
8. Wiring Diagrams	. 5
9. Important Safety Instructions	. 7
10. Specifications	. 7




- Thank you very much for choosing COMMAX.
- Please read this manual carefully before you use the product.

## 2. Warnings and caution


Please follow the things described below in order to prevent any danger or property damage.

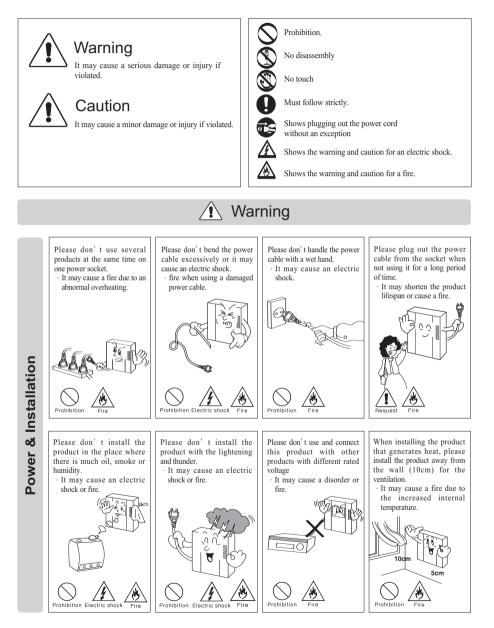

2

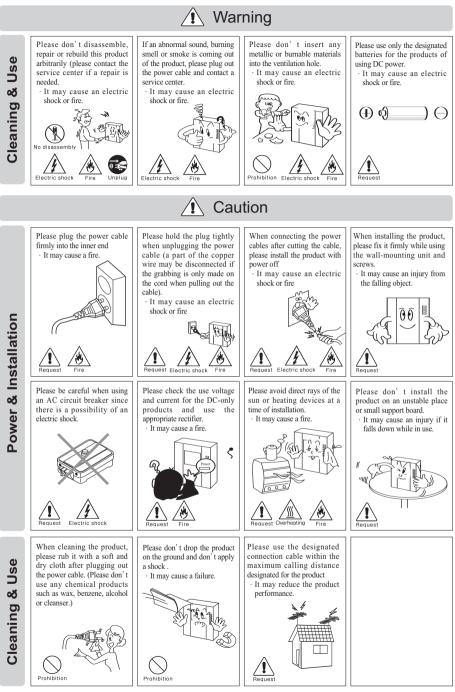

COMMAX



The junction box supplied may be mounted to a wall or single-gang outlet box. The screw terminal designations are as follows:

1, 2,11, 12	Station Number
L :	Call line terminal
	Audio ground
+ :	24V DC(+) connection
- :	24V DC(-) connection

Lay the system out before beginning installation. Decide on the most efficient cable runs and assign station numbers. Future service or expansion of the system will be facilitated if you draw a diagram of the system. System wiring diagram is shown in Figure 2.

### 👕 4. Wiring

Use multi-conductor cable. Do not use twisted pair or shielded cable. The number of conductors required equals 3, plus the total number of Stations. Single Master/Remote system wiring consists of 2-conductor cable from each remote to the master. Begin wiring with station number 1. Write the color code of each wire on your diagram. Be sure to connect the proper. wire to the L terminal at each station. Be sure to observe correct polarity when connecting the power supply.


## **N**

#### 5. Power Supply

Use only the model RF-2AS power supply. BE SURE TO OBSERVE CORRECT POLARITY WHEN CONNECTING THE POWER SUPPLY TO THE JUNCTION BOX.

Connect power supply after system wiring is complete.



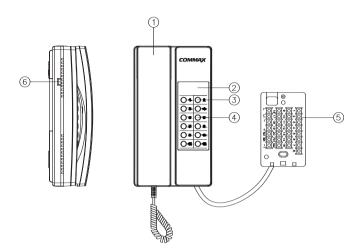

- 1 Handset
- 2 Button Plate
- ③ Call Button
- ④ LED Lamp
- (5) Conductor
- 6 Volume Switch



#### 1. Master to Remote

Raise the handset and press the desired call button. A call siginal will be heard at the selected station.

Place the handset on the hook switch to end a call.

#### 2. Remote to Master

Just lift up the handset, a call siginal will be heard from the Master. When finish talking, place the handset for stand-by.



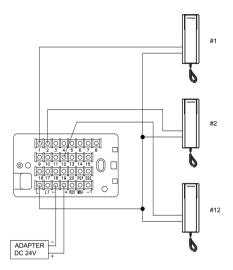


Figure 1. System Wiring Diagram

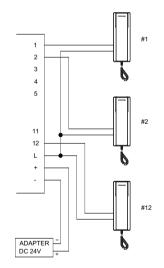


Figure 2. TP-12RM master with TP-S remotes

### 9. Important Safety Instructions

- Do not connect the power supply until system wiring is complete.
- Except for the power supply AC power cord plug, do not connect wires directly to AC power.
- Do not expose any equipment to rain or moisture
- Do not hammer on or staple through cables.
- Route cables away from excessive heat and high-voltage cables.
- Do not alter component wiring.



#### 10. Specifications

- No.of stations : Single master and up to 12 remotes.
- Operating Voltage : 24VDC
- Power Supply : Model RF-2AS
- Supply Current : 30m A minimum(idle),170mA maximum
- Output Impedance : 6 ohms
- Station Operation : Master Push button station selection:

full duplex handset communication

7


COMMAX

Remote - lift up handset only.

Call Signal : Master to remote - electric call tone.

Remote to master - Melody sound.

- Distance : 1km with Ø0.65 cable
- Wiring required : Multi conductor cable.
- Mounting : Wall or desk-top. Junction boxes supplied.
- Temperature : 0'C~40'C(32'F~104'F)
- Dimensions: 116 X 208 X 67mm

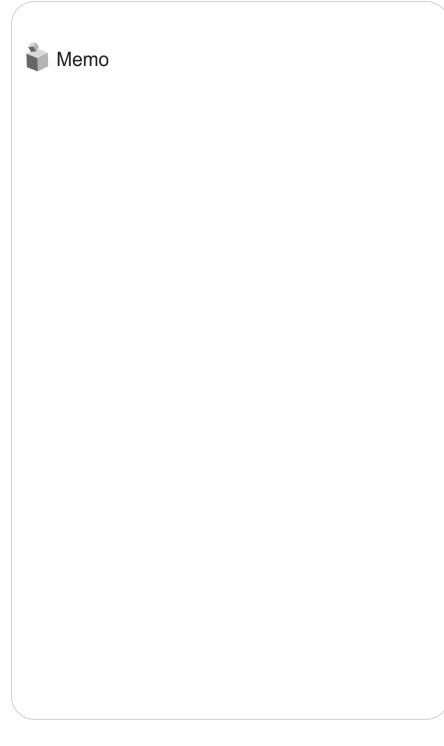



#### **COMMAX Co.,Ltd.**

513-11, Sangdaewon-dong, Jungwon-gu, Seongnam-si, Gyeonggi-do, Korea Int'l Business Dept. Tel. : +82-31-7393-540~550 Fax. : +82-31-745-2133 Web site : www.commax.com

Printed In Korea / 2011.05.104