

## DS-UPS3000 UPS



- LCD display
- Wide input voltage range
- Built-in AVR
- Super fast charging
- Overload and short circuit protection
- USB port for remote control
- Compact design


## ▪ Specification


Model		DS-UPS3000
<b>Power</b>	UPS Capacity	3000 VA / 1800 W
<b>Input</b>	Input Voltage Range	140 VAC to 290 VAC
	Input Frequency	50/60 Hz
<b>Output</b>	Output Voltage Range	210 VAC to 235 VAC
	Output Frequency	50 Hz ± 0.5 Hz
	Transfer Time	≤ 10 ms
	Waveform	PWM
<b>Battery</b>	Battery Type	12 V/9 Ah *4 pcs
	Recharge Time	6-8 hours recover to 90% capacity
<b>Indicator</b>	Display	LCD Screen Input Voltage, Output Voltage, Battery capacity, load level
	Alarm	Charging Mode (DC mode): Sounding every 8 seconds Low Battery: Sounding every second Overloading Mode: Sounding every 0.5 seconds Fault: Continuously sounding
<b>Interface</b>	Communicate Ports	USB
<b>Protection</b>	Full Protection	Surge protection, Overload protection, Short circuit protection
<b>General</b>	Operating Temperature	0 °C to 40 °C (32 °F to 104 °F)
	Operating Humidity	30% to 90% (non-condensing)
	Dimension	412 mm × 145 mm × 210 mm (16.22" × 5.71" × 8.27")
	Weight	Approx. 18.5 kg (40.8 lb)

## ▪ Available Model

DS-UPS3000

▪ Dimension

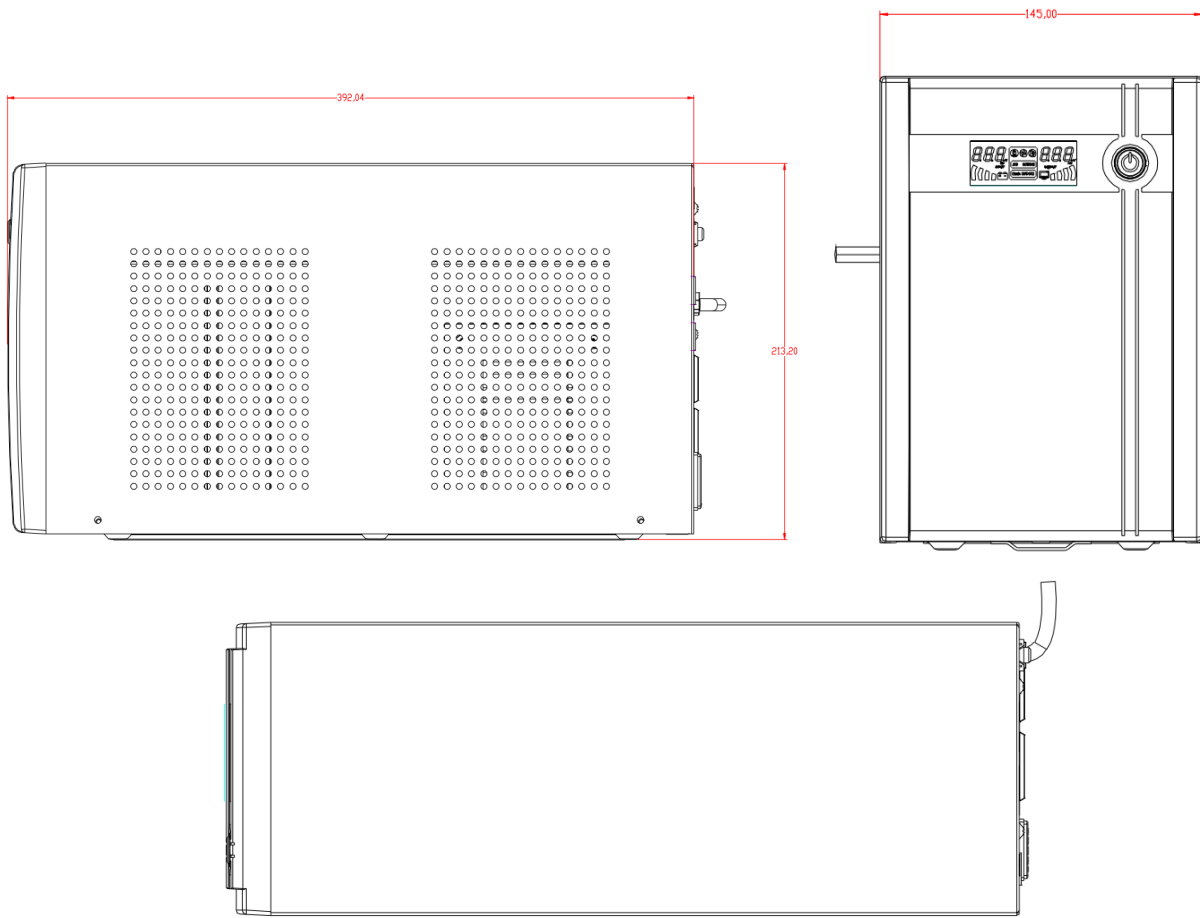

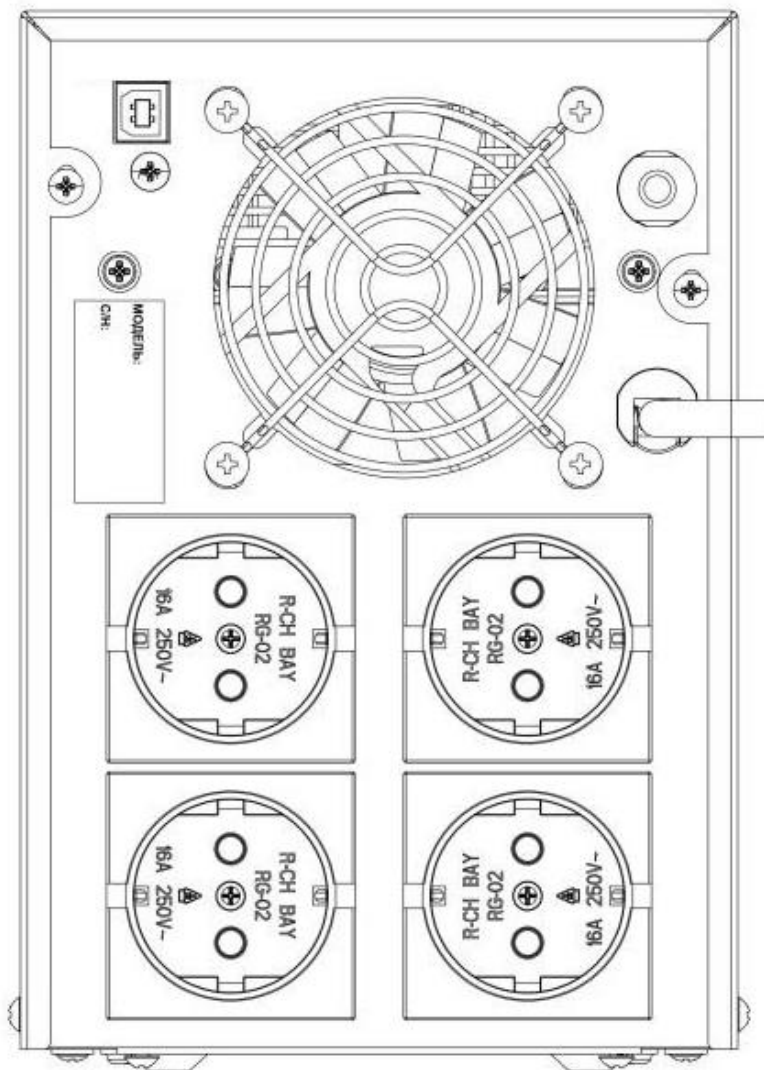

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision\_Global



Hikvision  
Corporate Channel



hikvisionhq