




# DATASHEET

## TRASSIR TR-NS1126-225-24PoE

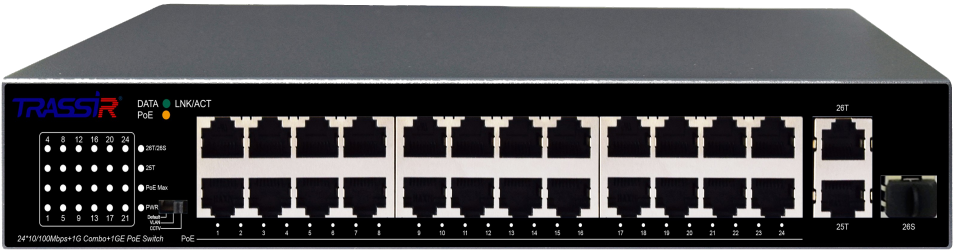

**TR-NS1126-225-24PoE** is an unmanaged switch with 24 10/100 Mbps PoE ports with the ability to power up the connected devices power twisted pair.

### Basic equipment:

- Switch ..... 1pcs.
- Power cable ..... 1pcs.
- Rack mounting kit..... 1pcs.
- Datasheet ..... 1pcs.

## Specification:

<b>Model</b>	<b>TR-NS1126-225-24PoE</b>
<b>Ethernet ports</b>	24*10/100 Mbps 1 Combo * 10/100/1000 Mbps 1* 10/100/1000 Mbps RJ45 port
<b>PoE protocols</b>	32W General: 225 W
<b>Maximum capacity per port</b>	EEE802.3af/at
<b>Power pinout via PoE</b>	DC+: 1/2 DC-: 3/6
<b>Switching capacity</b>	8.8 Gbps
<b>Transmission speed</b>	6.5 M pps
<b>Buffer size</b>	4 Mb
<b>MAC addresses table sizes</b>	16000
<b>Stream management</b>	Enabled by default
<b>Function</b>	VLAN CCTV
<b>PD Alive<sup>1</sup></b>	Supported. The port restarts 180 seconds after device connection loss
<b>Permissible humidity level</b>	5 – 95 %
<b>Power Input</b>	55V DC power adapter
<b>Lightning protection</b>	Standard mode 4 kV Differential mode 6 kV
<b>Electrostatic discharge protection</b>	Air discharge 8kV Contact discharge 6kV
<b>Power consumption</b>	240 W (PoE:225 W + Switch:15 W)
<b>Working temperature</b>	0°C...40°C
<b>Weight, kg</b>	2.04
<b>Dimensions (W xD x H), mm</b>	280 x 180 x 44

<sup>1</sup> For more details, see the user manual for the device.

## Warranty service:

- Three - year warranty service from the date of sale.
- In case the warranty card absence, the warranty period is determined from the date of sale.  
You can check the detailed description of the device settings in user guidelines on our web site [www.trassir.com](http://www.trassir.com).

DATE OF SALE

DEVICE SERIAL NUMBER