



### QUICK MAINTENANCE WITHOUT POWER INTERRUPTION

#### Easy switching to utility power during UPS maintenance


Designed for Uninterruptible Power Supply (UPS), the Maintenance Bypass PDU (MBP) Series allows utility power to bypass the UPS, so that users can perform quick and safe maintenance without having to shut down power system and connected equipment. The MBPs support flexible installation to meet different space requirement.

#### SERIES FEATURES

- > 1U Rackmount
- LED Status Indicator
- Metal Housing
- Retaining Clip Design
- Multiple Mounting Options
- Rack Ears Included
- Cascading Design

#### PRODUCT CALLOUTS

- 1 . AC Outlets
- 2 . Output Circuit Breaker
- 3 . LED Status Indicators
- 4 . Maintenance Bypass Switch
- 5 . "To UPS Output" Inlet
- 6 . "To UPS Input" Outlet
- 7 . "Utility Power" Inlet

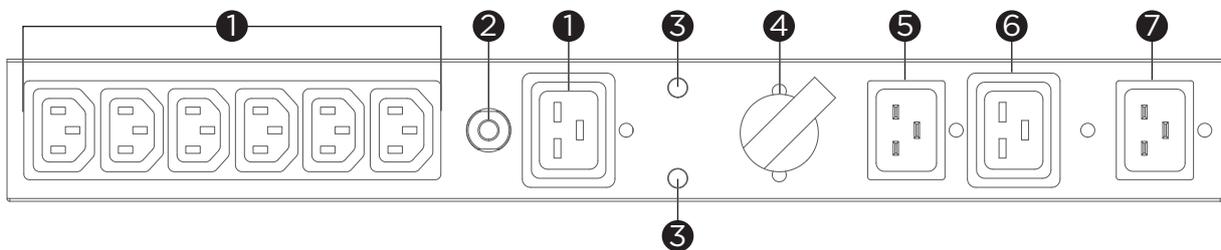

MBP20HVIEC6

## TECHNICAL SPECIFICATIONS

<b>Model Name</b>	<b>MBP20HVIEC6</b>
<b>General</b>	
Compatible Models	OL1000ERTXL2U, OL1500ERTXL2U, OL2000ERTXL2U, OL3000ERTXL2U, OL3KERTHDL, OLS1000ERT2UA, OLS1500ERT2UA, OLS2000ERT2UA, OLS2200ERT2UA-B, OLS3000ERT2UA, OLS3000ERT2UA-B, US10001TSARM, US10001.5TSARM, US10002TSARM, US10003TSARM, OLS1000RT2UA, OLS2000RT2UA, OLS3000RT2UA
<b>Input</b>	
Input Voltage Range (Vac)	200 - 240
Rated Input Current (A)	16
Utility Power	IEC C20
UPS Power Input	IEC C19
UPS Outlet	IEC C20
<b>Output</b>	
Outlet Type	IEC C19 x 1, IEC C13 x 6
Typical Transfer Time (ms)	<4
Cascading	Yes, IEC 16A Output Socket
<b>Management</b>	
LED Indicators	Normal Status (Green Color), Bypass Status (Red Color)
<b>Physical</b>	
Form Factor	>1U Rackmount
Enclosure Construction	Metal
Color	Black
Installation	Multi-Position Mountings, Vertical Rackmount, Horizontal Rackmount
Installation Attached to Rack/Tower UPSs	Yes
<b>Physical Size</b>	
Dimensions (WxHxD) (mm.)	433 x 51 x 76
Weight (kg.)	1.3
<b>Shipping Dimensions</b>	
Dimensions (WxHxD) (mm.)	245 x 66 x 500
Weight (kg.)	3.5
<b>Environmental</b>	
Operating Temperature (°C)	0 - 40
Operating Relative Humidity (Non-condensing) (%)	0 - 90
Operating Elevation (feet/meters)	0-9,843 feet (0-3,000 meters)
Storage Temperature (°C)	-15 - 45
<b>Certifications</b>	
Certifications*	CE
RoHS	Yes

\*Certifications may vary according to different regions. Visit [www.cyberpower.com](http://www.cyberpower.com) for more information.  
#All specifications are subject to change without notice.