#### DATASHEET

### 24 inches IT Monitor

#### MW-LC24-E



#### Features

- Resolution is up to at 1920 x 1080.
- Refresh rate up to 100 Hz.
- 178 horizontal and vertical viewing angle.
- Screen can reduce blue light, protect eyes.
- Plastic body, ultra-narrow bezel, light weight and elegant.
- Shielding cover design, effectively preventing electromagnetic radiation.
- Stable structure design, highly durable.
- Automatically detect if the signal is connected successful.
- Support multiple language.


#### **Specifications**


Panel	Description
Backlight	LED
Panel Size	24"
Pixel Pitch (H x V) (mm)	0.27 x 0.27
Resolution	1920 x 1080
Color Support	16.7 M

### DATASHEET

Brightness (cd/m <sup>2</sup> )	250
Contrast Ratio	4000:1
Refresh Rate	100 Hz
Response Time (ms)	5
Viewing Angle (H/V)	Horizontal 178°, Vertical 178°
Display Size (mm)	533.0 x 299.5
Operation Hour	18/7
Interface	Description
Video Input	1 x HDMI(1920 x 1080@100 HZ), 1 x VGA(1920 x 1080@60 HZ)
VESA	Description
VESA (mm)	75 x 75
Wall-mounted Thread	4-M4 Threaded Hole, 8mm Deep Thread
OSD	Description
Multi-Language	Chinese, English, German, French, Italian, Spanish, Portuguese, Turkish, Polish, Dutch, Japanese, Korean
General	Description
Input Voltage	DC 12 V, 2.0 A
Typical Power Consumption (W)	≤25
Standby Power Consumption (W)	≤0.5
Package Dimensions (W x H x D) (mm)	612 x 405 x 101
Weight (Kg)	Net Weight: 2.82 Gross Weight: 3.84
Operating Temperature	0°C ~ 40°C
Operating Humidity	10% ~ 85% (No Condensation)
Storage Temperature	-20°C ~ 60°C
Storage Humidity	5% ~ 90% (No Condensation)
Standard	1 x HDMI Cable, 1 x Quick Guide, 1 x Pedestal, 1 x Adapter

#### Dimensions

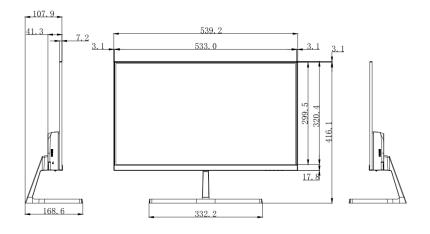



#### Interface



### Ordering Info

Product Model	Description
MW-LC24-E	24 inches IT Monitor

#### Zhejiang Uniview Technologies Co., Ltd.

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

http://www.uniview.com

©2024 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.

\*Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such

errors and reserves the right to change the contents of this document without prior notice.